


**22HDX-U: 48' Long, 13'3" High, 8'6" Wide - Expands to 12'6"**



## PRODUCTION

- Grass Valley HD Kalypso Switcher 1080i/720p
- 4 MEs plus PGM/PST with 75 inputs, 48 outputs
- 6 internal transform engines
- Switchable 720p or 1080i
- Avitech Multiviewer Monitors w/UMD and Tally

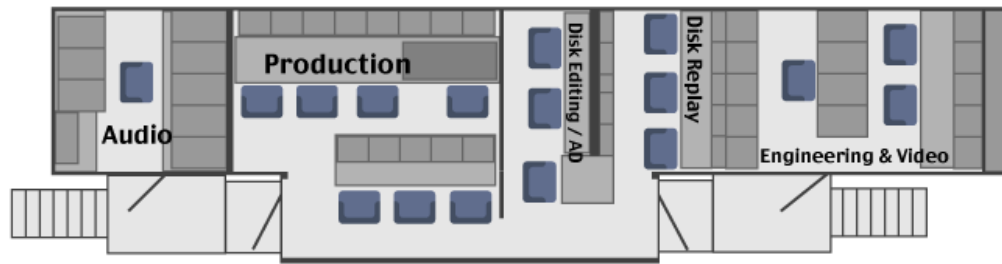

22HDX-U Production

## CAMERAS/LENSES & SUPPORT

- 7 Grass Valley LDK 8000 Elite Triax Cameras 1080i or 720p
- 7 Canon 72 x 9.3 Hard Lenses
- 3 Canon 17 x 7.6 ENG Lenses
- 1 Canon 12 x 6.5 ENG Lens
- 6 Grass Valley SuperExpander Long Lens Adapter
- 7 Vinten Vector 70 Heavy Duty Pan/Tilt Heads
- 7 Mathews MT1 Heavy Duty Tripods
- 4 Gitzo ENG Tripods w/Libec H85 Pan/Tilt Heads
- 1 Studio Config Viewfinder for a HH Camera (When requested)
- 1 Panasonic AG-HPX370 for booth w/fiber converters (2 ST fibers required) w/medium duty tripod
- 2 SD LPS Clock Cameras



22HDX-U Replay



22HDX-U Audio

## REPLAY, SPOTBOX AND EDIT SYSTEMS

- TWO 6 Channel HD XT2 Full Editing Units (4in/2out)
- TWO 4 Channel HD XT2 Replay Only Unit (2in/2out)
- ONE 4 Channel XS Server for Spot Box w/Lance Controller
- Gig-E network available
- ONE XFile3 with removable hard drive and USB 3.0
- TWO DVD Player/Recorders
- TWO DVC Pro HD VTR's

## COMMUNICATION

- Telex 64 port Cronus Intercom
- 19 Telex 325 Intercom belt packs
- Telex 12 channel IFB
- 12 Telex 4030 IFB belt packs
- 4 TELOS One Phone Interfaces
- 2 RTS TIF-2000 Phone/Intercom Interfaces
- 12-line NEC Telephone System
- Motorola Radios: 2 base, 12 portable

## AUDIO

- Euphonix MaxAIR Audio Console  
108 analog inputs, 30 AES pairs in. 108 analog outputs, 30 AES pairs out.  
56 faders
- One Digicart E with Zip drive 250 mb
- CD Player
- 4 Sennheiser MKH-70 Long Shotgun
- 4 AT 4071A Long Shotgun
- 4 Sennheiser 416 Short Shotgun
- 2 AT 4073A Short Shotgun
- 6 RE 50b Stick Mics
- 6 635 Stick Mics
- 8 Sony ECM-77b Lavaliers
- 6 Sportscaster Headsets
- 6 Daltech Announce Boxes
- Videotek ASM-100 Audio Scope
- 4 Parab Dishes

## OUTBOARD MONITORS

- SIXTEEN Portable Color Monitors

## CABLE

- 5000' triax
  - 2000' DT12
  - 150'- 3 Phase Power Cable
- Additional cable available if shipped separately

## POWER REQUIRED

- 208 VAC, three phase, 200 amps

*Separate 200 amps of three phase 208 VAC may be required in high heat/humidity locations*

## ENGINEERING & MISC

- 128 x 256 HD Harris Video Router
- 6 Utility HD to SDI Downconverters
- 12 AJA FS1 Frame Sync/Cross Converters
- 2 AJA FS2 Frame Sync/Cross Converters with fiber in/out
- 2 Lighting Kits
- 2 MPEG4 Encoders
- 1 MPEG4 Decoder

## GRAPHICS

- Chyron HyperX3 HD w/ USB 3.0
- For- A HD Telestrator
- Rackmount Fox Box (provided for FSN shows only)