


## 23 HDX Equipment Specifications

Length: 48' Height: 13'3" Width: 8'6" with ability to expand to: 12'6"

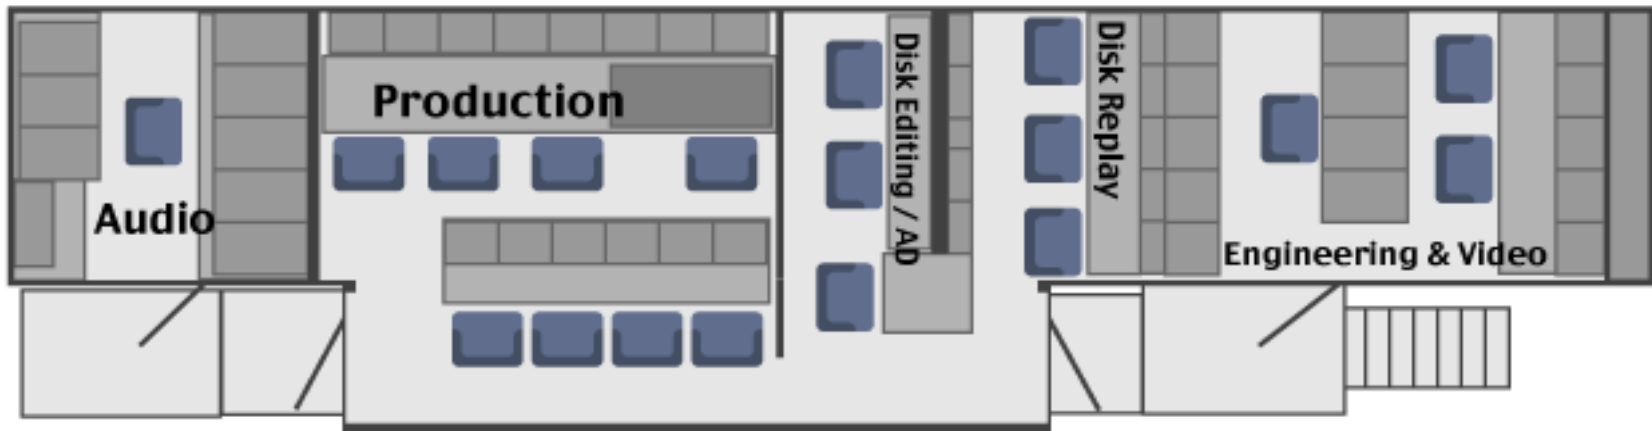

# 23 HDX Equipment Specifications

## Production

- Grass Valley HD Kayenne switcher
- 4.5 M/Es, 96 inputs/48 outputs
- Internal Image Store
- 4 iDPMs/2 eDPMs
- 4 Stripe (M/E) control panel
- Up to 90 images in production wall

## Cameras/ Lenses & Support

- 5 Grass Valley LDX 80 Premier 720p/1080i triax cameras
- Canon 75x9.3 long lens
- 5 Canon 72x9.3 long lenses
- Canon J21x7.8B ENG lens
- Canon YJ18x9B ENG lens
- Canon KJ17Ex7.7B ENG lens
- Studio Config Kit with LCD VF
- 6 Grass Valley SuperExpander sleds long lens adapters
- 6 Vinten Vector 70 heavy duty pan/tilt heads
- 6 Mathews MT1 heavy duty tripods
- 3 Gitzo ENG tripods with Libec H85 pan/tilt heads
- 2 SD LPS clock cameras

## Replay, Spotbox and Edit Systems

- 12 Channel EVS XT3 full editing units
  - *Can be split into 2 operator positions each with 4 inputs/2 outputs*
  - *One position uses LSM Connect (No VGA)*
- 6 Channel XT3 full editing units 4 inputs/ 2 outputs
- 4 channel HD XT3 full editing units 2 inputs/ 2 outputs
- Codecs supported:
  - *M-JPEG – User selectable bitrate 20-360Mbps*
  - *Avid DNxHD® (120/145Mbps)*
  - *Avid DNxHD® High Level (185/220Mbps, 8-bit and 10-bit)*
  - *VC-3 (SMPTE 2019-1; Avid-compatible) 100Mbps*
  - *Apple ProRes® 4:2:2 (120/145Mbps)*
  - *Apple ProRes® 4:2:2 HQ (185/220Mbps)*
  - *Apple ProRes® 4:2:2 LT (85/102Mbps)*
  - *MPEG-2 intra – User selectable bitrate 20-360Mbps*
  - *DVCPRO HD*
  - *AVC-Intra Class 100*
  - *XAVC-Intra Class 100*
- 8 Channel K2 Summit with Dyno for instant replay of two 6x SSMO cameras (With file transfer of clips of EVS network)
- 4 Channel EVS XS server for Spotbox
- Lance TDC-100 Disk Controller
- XFile3 with USB 3.0
- GigE network available
- 2 DVD player/recorders
- Up to 4 replay operator positions

## Audio

- Euphonix MaxAir Audio console
- 108 Analog inputs/ 108 analog outputs, 30 AES pairs in/ 30 AES pairs out, 56 faders
- Enco Hotshot2 Audio Playout System
- Digicart E with ZIP drive
- CD Player
- 7 Sennheiser ME-67 long shotgun mics
- 5 Sennheiser ME-66 short shotgun mics
- 5 RE 50 stick mics
- 5 EV 635 stick mics
- 4 MD-46 stick mics
- 5 Sony ECM77B lavalier mics
- 7 Sennheiser HMD sportscaster headsets
- 6 Daltech talkback boxes
- 6 DT12 Breakout Boxes
- 10 DT12 fanout
- 4 Fostex portable speakers
- Fiber Booth Kit (Upon request)
- Parab dishes (Upon request)

## Communications

- Telex 80-port Cronus intercom
- 12 Channels of IFB
- 10 Channels of PL
- 18 Telex 325 intercom beltacks
- 11 Telex 4030 IFB beltacks
- 4 Telos One Interface
- 3 RTS TIF 2000As
- 12 Line NEC phone system
- 6 Two-Way Radios with 2 base stations

## Graphics

- For- A Telestrator with HD touchscreen

## Engineering & Misc

- 128x256 Grass Valley HD- SDI Video Router
- 17 Frame sync/cross converters
  - *12 AJA FS-1s, 3 AJA FS-2s, 2 Harris X-50s for a total of 20 paths*
- TSI-1000 tally system with virtual tally
- 10 Utility HD to SDI/NTSC downconverters
- 2 Lighting Kits

## Outboard Monitors

- Nine 15" LCD portable field monitors
- Eight 9" portable color monitors
  - *Capability to provide HD program to booth (If fiber is available)*

## Cable

- 5000' Triax
  - *Four 500', Ten 250', Five 100'*
  - *One 6 line triax 175'*
- 250' 10 Line video mult
  - *One 125', One 75', One 50'*
- 450' TAC singlemode fiber
  - *Two 150' TAC-12, One 150' TAC-6*
- 2000' DT12
  - *Five 250', Five 150'*
- 225' Three phase power cable
  - *Sets of 100', 75', and 50'*
- Additional cable available if shipped separately

## Power Required

- 208 VAC, three phase, 200 amps
  - *Separate 200 amps of three phase 208 VAC may be required in high heat locations*