


49 FLEX-CC Equipment Specifications

Length: 53' Height: 13'3" Width: 8'6" with ability to expand to: 13'8"

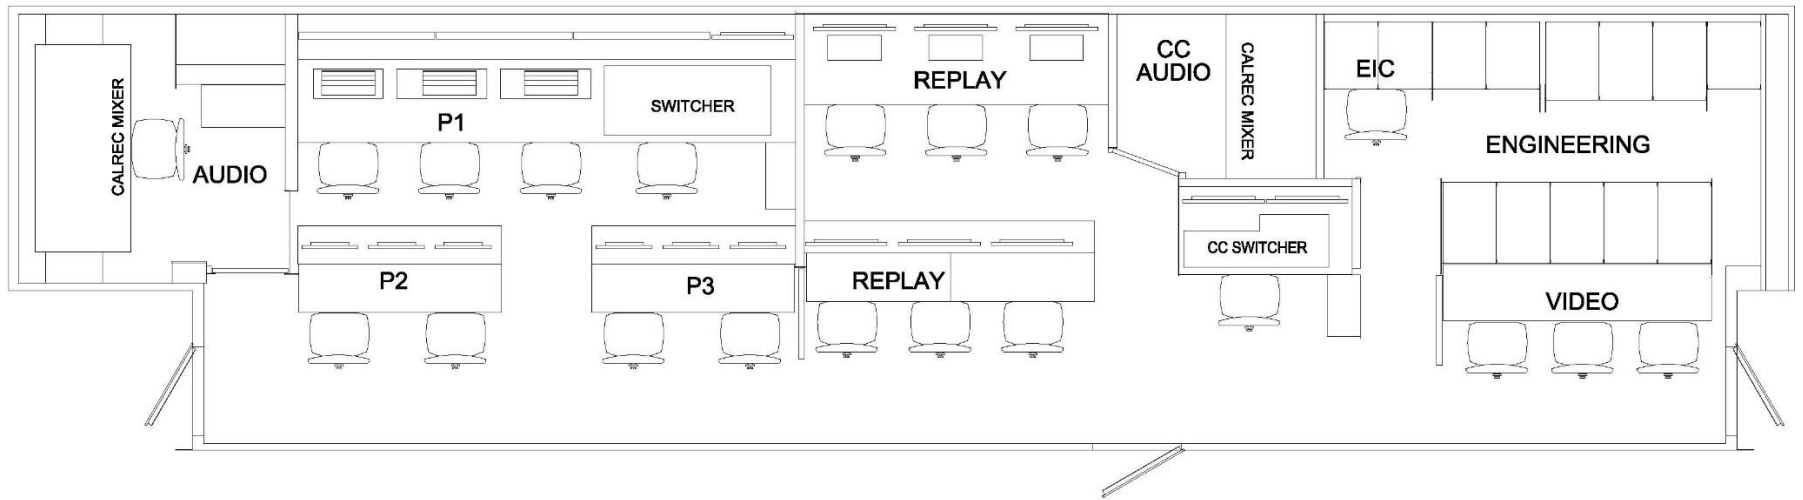

49 FLEX-CC Equipment Specifications

Production

- Grass Valley Kayenne K-Frame X IP switcher
- 7 M/Es, 96 inputs/48 outputs
- Internal Image Store
- 12 iDPMs, 2D DPMs, FlexiKey, DoubleTake
- 32 Chroma Keyers
- 4 Stripe (M/E) control panel
- Up to 132 images in production wall

Cameras/ Lenses & Support

- 7 Grass Valley LDX82 Premier 720p/1080i triax cameras with twin XCUs
- 4 Grass Valley LDX86 universe super slow mo HD/3G fiber cameras (Upon request. Can be used as regular live cameras)
- Grass Valley LDK 8000 Elite triax camera with Fujinon XA20sx8.5 ENG lens with tripod (Booth)
- 4 Grass Valley HDX plus fiber converters (SHEDS)
- Canon XJ100x9.3 long lenses
- 4 Canon XJ95X8.6B long lenses
- 2 Canon XJ76x9 long lens
- Additional 2 Canon XJ76x9 long lenses (May not travel on MU)
- Four 2" Color ENG VFs
- 2 Fujinon ZA22X7.6 ENG lenses
- 2 Fujinon HA18x5.5 ENG lenses
- Studio Config Kit
- 8 Hard camera sleds with 7" OLED VFs
- Additional hard camera Sleds with 7" OLED VF (May not travel on MU)
- 8 Vinten Vector 75 heavy duty pan/tilt heads
- Additional heavy duty pan/tilt head (May not travel on MU)
- 8 Mathews MT1 heavy duty tripods
- Additional heavy duty tripod (May not travel on MU)
- 4 ENG tripod/pan/tilt heads
- 2 HD LPS clock cameras

Replay, Spotbox and Edit Systems

- Four 12 channel EVS XT-VIA IP full editing replay servers with 16 channels of embedded audio
 - 4 SSMO, 16 HD inputs/12 HD outputs when truck is running in SSMO mode
 - 2 XT-VIAs can be split into two operator positions each with 4 inputs/2 outputs
 - 32 HD inputs/16 HD outputs when truck is running in HD mode
 - Two positions use LSM Connect (No VGA)
- 4 Channel EVS XS VIA server for Spotbox (2 channels per show during dual feeds)
- Codecs supported:
 - XAVC-Intra class 300 and 480 codec for UHD-4K
 - DNxHR for UHD4K (available in Q4 2018)
 - XAVC-I, AVC-I, DNxHD and ProRes for HD/FHD
 - MJPEG and H.264 proxy onboard
- Lance TDC-100 Disk Controller
- XFile3 with USB 3.0
- XHUB-VIA IP 10G for server to server transfers
- 10G Network for XFile transfers
- Up to 6 replay operator positions

Audio

- CALREC Artemis Beam Audio Mixer (56 fader) 256 routable inputs via IP, 64 analog inputs/64 analog outputs
- RTW TM7 audio scope
- Audio Board can output multiple channels of surround sound
 - Encoders for surround sound are the clients responsibility
- Enco Hotshot2 audio playout system
- CD player
- 8 Sennheiser MKH 416 short shotgun mics
- 6 Sennheiser MKH 70 P48 long shotguns mics
- 11 Sennheiser MD 46 stick mics
- 6 Sony ECM77B lavaliers
- 4 Crown PCC-160 Cardioid Microphones
- 7 Sennheiser HMD sportscaster headsets
- 6 Studio Technologies talkback boxes
- 3 Whirlwind MD-1 Mic/Line Drivers
- 4 Sound devices MP-1 line amps
- 3 Cloud CL-1 Mic activator
- 4 DT12 Breakout Boxes
- 14 DT12 fanouts
- 5 Fostex portable speakers
- Fiber Booth Kit (Upon request)
- Parab dishes (Upon request)

Communications

- RTS ADAM-M Matrix System
- 64 Ports of OMNEO, 64 channels of MADI, 48 analog ports, 16 ports of RVON
- 12 Channels of IFB
- 12 Channels of PL
- 12 RTS 4030 IFB beltpacks
- 18 RTS BP325 headset boxes
- 4 Telos One Interfaces
- 4 RTS TIF 2000As
- 12 Line phone system
- 8 Two-Way Radios with 2 base stations

Graphics

- VizRT
- For-A Telestrator with HD touchscreen
 - 2 ST fibers required

Engineering & Misc

- 384 Port Evertz EXE 2.0 IP router with up to 9600GB/s
- 10,240x10,240 Evertz audio router connected via IP to CALREC
- Embedded audio, 18 MADI, 48 AES, 96x192 analog
- 9 Frame sync/cross converters with fiber inputs/outputs
 - 2 AJA FS1-Xs, 7 AJA FS-HDRs for a total of 30 paths
- TSI-4000 tally system with virtual tally
- 2 Lighting Kits

Outboard Monitors

- Sixteen 16" Outboard LCD video monitors
 - Capability to provide HD program to booth (If fiber is available)

Cable

- 600' 10 Line video mult
 - Two 125', Four 75', One 50'
- 1500' TAC singlemode fiber
 - Three 300' TAC-12, Four 150' TAC-12
- 1500' SMPTE fiber
 - Four 250', Four 100', Four 25'
- 3975' Triax
 - Three 500, Six 250', Eight 100', Seven 25'
 - Two 6 line triax mults 150'
- 2300' DT12
 - Five 250', Seven 150'
- 175' Three phase power cable
 - Set of 100' and 75'
- Additional cable available if shipped separately

Power Required

- 208 VAC, three phase, 200 amps
 - Separate 200 amps of three phase 208 VAC may be required in high heat locations

In Person Duals with Cloud-C1

- Grass Valley Kayenne K-Frame 2 Stripe panel
- Grass Valley LDK 8000 Elite triax camera with Fujinon XA20sx8.5 ENG lens with tripod (Booth)
- Lance TDC-100 Disk Controller
- XFile3 with USB 3.0
- CALREC Brio 36 (36 fader)
 - 24 Mic/line inputs
 - 16 Analogue outputs
 - 8 AES3 digital inputs, 8 AES3 digital outputs
 - 8 GPI + 8 GPO
 - Loudness meters
 - Delay available on every path
 - Up to 96 legs assignable as mono, stereo, or 5.1 input channels
 - 36 legs assignable as mono, stereo or 5.1 mains or groups
 - 24 legs assignable as mono or stereo auxes
 - Up to 96 legs assignable as Insert sends and returns
 - Up to 96 legs assignable as Direct, or Mix-Minus Outputs
 - Every input channel and group path have expander/Gate/Ducker, with key input and sidechain EQ; a compressor with key input and sidechain EQ and multiband compressor
 - Every aux has expander/gate and compressor
 - Every main has a single band compressor and multiband compressor
- Enco HotShot2 audio playout system
- 5 Sennheiser MD 46 stick mics
- 4 Sennheiser HMD sportscaster headsets
- 4 Studio Technologies talkback boxes
- Whirlwind MD-1 Mic/Line Driver
- Sound devices MP-1 line amp
- Cloud CL-1 Mic activator
- 8 Channels of IFB
- 6 RTS 4030 IFB beltpacks
- 6 RTS BP325 headset boxes
- 2 Telos Hx2 digital telephone interfaces
- 2 Two-Way Radios with base station
- For-A Telestrator with HD touchscreen (Upon request)
 - 2 ST fibers required
- VizRT
- Lighting Kit
- 600' DT12
 - Four 150'