


Puma HD-2: 40' Long, 13' High (Uplink Dish 20' High), 8'6" Wide - Expands to 11'6"

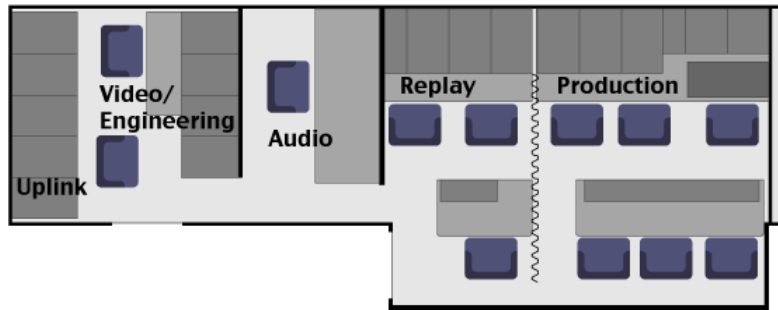

PRODUCTION

- GVG Kayak 2.5 ME HD Switcher 48 inputs, 24 outputs, 5 Internal DVEs
- Abekas HD ClipstoreMXc DDR w/Lance Controller

CAMERAS/LENSES & SUPPORT

- 5 Grass Valley LDK 8000 Elite triax Cameras (720p/1080i)
- 3 Canon 72 x 9.3 lenses with 2x extenders
- 2 Canon 17x lenses with 2x extenders
- 2 Studio Config Viewfinders
- 2 SD clock cameras

AUDIO

- Allen & Heath stereo audio analog mixer 40 inputs, 16 outputs
- 1 Digicart II Plus with zip drive
- 2 Sennheiser ME 67 long shotgun mics
- 3 Sennheiser ME 66 short shotgun mics
- 3 Sennheiser HMD 25-1 Announcer Headsets with talk-back boxes
- 5 EV 635 Interview mics
- 5 Sony ECM-77 lavalier mics

ENGINEERING & MISC

- Pesa Cougar 64 x 64 HD router
- Blackmagic Videohub HD Router 72 x 144 (for monitor walls)
- 8 AJA FS1 HD Frame Syncs/Cross Converters
- 1 AJA FS2 HD Frame Syncs/Cross Converter
- 1 Lighting Kit
- 2 Parab Dishes
- Uplink: KU Band 2.4 meter dish



Puma HD-2 Exterior

REPLAY, SPOTBOX AND EDIT SYSTEMS

- XFile3 with removable hard drives
- One 6-channel HD XT2 full editing (4in/2out)
- One 4-channel HD XT2 Replay Only (2in/2out)
- One 4-channel XS Server for Spot Box w/Lance Controller
- GigE network available
- ONE JVC DVD Recorder
- Master time-code generator

COMMUNICATION

- Telex 32-port Cronus Intercom
- 12 Telex 325 intercom belt packs
- 6 Telex 4030 IFB belt packs
- 6-line Panasonic telephone system
- Motorola Radios: 1 Base, 4 portable
- 2 Telos Link Phone Interfaces
- 2 RTS Tiff Phone Interface

GRAPHICS

- Chyron HyperX3 HD
- NOTE- No rackmount FOX BOX

OUTBOARD MONITORS

- FIVE 15" Flat Panel Monitors

CABLE

- 5000' triax
- 2000' DT12
- 150'- 3 Phase Power Cable

Additional cable available if shipped separately

POWER REQUIRED

- 208 VAC, Single phase, 150 amps

Last Edited: 11/2/16

MOBILE TV GROUP | 8455 Highfield Parkway - Englewood, CO 80112 | 303.388.8500