



## 57FLEX & 57VMU Equipment Specifications

Length: 53' Height: 13'3" Width: 8'6" with ability to expand to: 16'6"

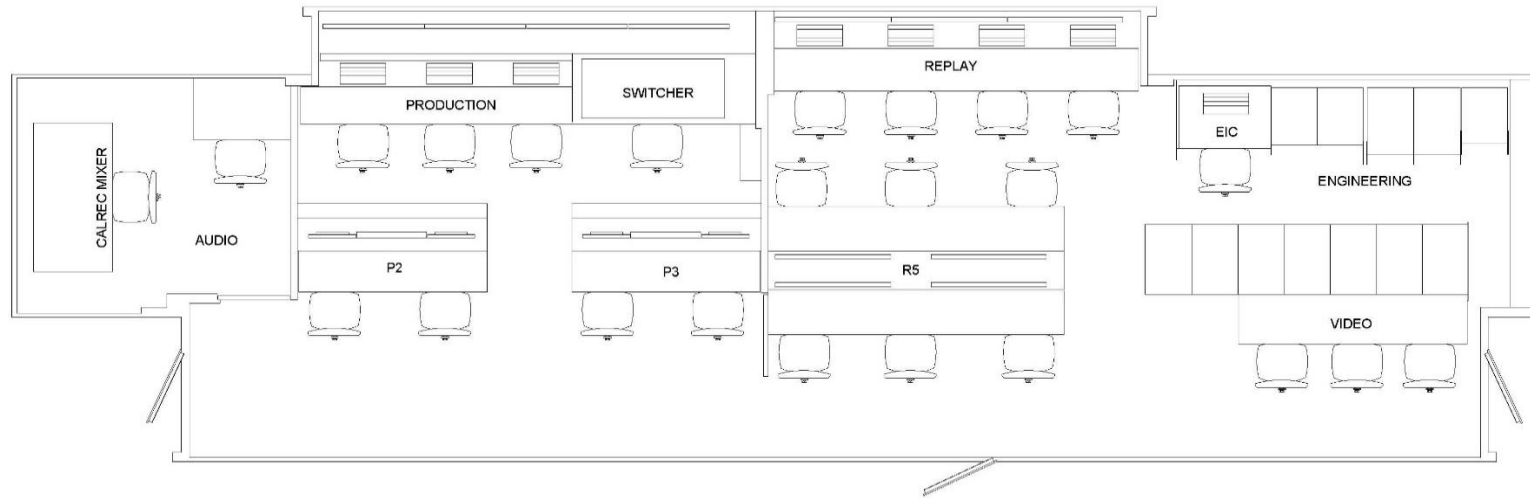

Length: 22' 7" Height: 13'5" Width: 8'

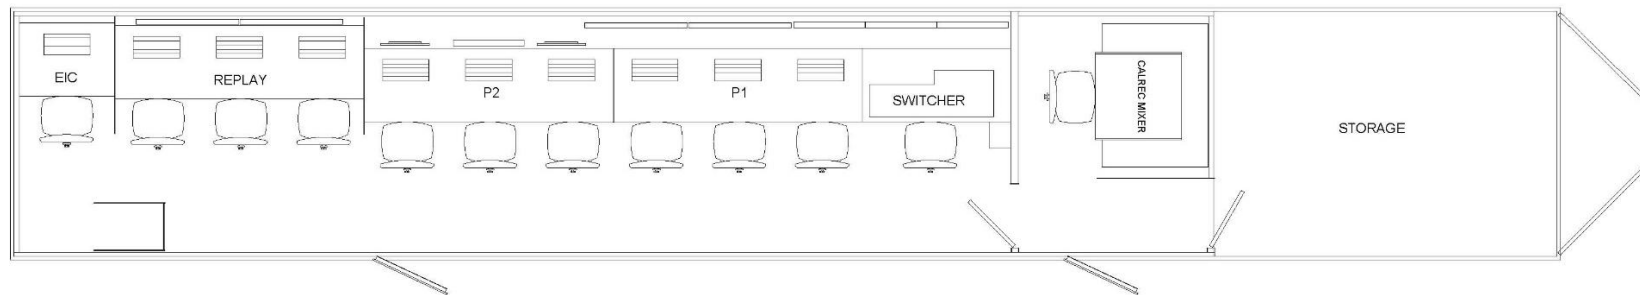

# 57FLEX Equipment Specifications

## Production

- Grass Valley Kayenne K-Frame XP switcher
- 7 M/Es, 96 inputs/48 outputs
- Internal Image Store
- 8 iDPMs, 2D DPMs, FlexiKey, DoubleTake
- 32 Chroma Keyers
- 4 Stripe (M/E) control panel
- Up to 132 images in production wall

## Cameras/ Lenses & Support

- 5 Grass Valley LDX98 Premier 720p/1080i/1080p fiber cameras with XCU's
- 2 Additional Grass Valley LDX98 Premier 720p/1080i/1080p fiber cameras with XCU's
- 4 Grass Valley LDX98 universe super slow mo HD/3G fiber cameras (Upon request. Can be used as regular live camera)
- Grass Valley LDX C98 single mode fiber camera with Fujinon XA20sx8.5 ENG lens with tripod (Booth)
- 11 Grass Valley HPE-300 fiber converters (SHEDS)
- 8 Canon UJ111x8.3 long lenses
- Additional Canon UJ111x8.3 long lense if using VMU
- Four 2" Color ENG VFs
- 2 Fujinon ZA22X7.6 ENG lenses
- 2 Fujinon HA18x5.5 ENG lenses
- Studio Config Kit
- 8 Hard camera sleds with 7" OLED VFs
- Additional hard camera Sleds with 7" OLED VF if using VMU
- 8 Vinten Vector 75 heavy duty pan/tilt heads
- Additional heavy duty pan/tilt head if using VMU
- 8 Mathews MT1 heavy duty tripods
- Additional heavy duty tripod if using VMU
- 4 ENG tripod/pan/tilt heads
- 2 HD LPS clock cameras

## Replay, Spotbox and Edit Systems

- Four 12 channel EVS XT-VIA full editing replay servers with 16 channels of embedded audio
  - 4 SSMO, 16 HD inputs/12 HD outputs when truck is running in SSMO mode
  - 2 XT-VIAs can be split into two operator positions each with 4 inputs/2 outputs
  - 32 HD inputs/16 HD outputs when truck is running in HD mode
  - Two positions use LSM Connect (No VGA)
- 4 Channel EVS XS VIA server for Spotbox (2 channels per show during dual feeds)
- Codecs supported:
  - XAVC-Intra class 300 and 480 codec for UHD-4K
  - DNxHR for UHD4K (available in Q4 2018)
  - XAVC-I, AVC-I, DNxHD and ProRes for HD/FHD
  - MJPEG and H.264 proxy onboard
- Lance TDC-100 Disk Controller
- XFile3 with USB 3.0
- XHUB-VIA 10G for server to server transfers
- 10G Network for XFile transfers
- Up to 6 replay operator positions

## Audio

- CALREC Argo S Audio Mixer (60 fader) 256 routable inputs via MADI, 64 analog inputs/64 analog outputs
- RTW TM7 audio scope
- Audio Board can output multiple channels of surround sound
  - Encoders for surround sound are the clients responsibility
- Enco Hotshot2 audio playout system
- 8 Sennheiser MKH 416 short shotgun mics
- 6 Sennheiser MKH 8070 P48 long shotguns mics
- 11 Sennheiser MD 46 stick mics
- 6 Sony ECM77B lavaliers
- 4 Crown PCC-160 Cardioid Microphones
- 7 Sennheiser HMD sportscaster headsets
- 6 Studio Technologies talkback boxes
- 3 Whirlwind MD-1 Mic/Line Drivers
- 4 Sound devices MP-1 line amps
- 3 Cloud CL-1 Mic activator
- 4 DT12 Breakout Boxes
- 12 DT12 fanouts
- 5 Fostex portable speakers
- Fiber Booth Kit (Upon request)
- Parab dishes (Upon request)

## Communications

- RTS Odin Digital Intercom System
- 96 Ports of OMNEO, 96 channels of MADI, 32 analog ports, 16 ports of RVON
- 12 Channels of IFB
- 12 Channels of PL
- 12 Model 34 Talent Amplifiers for IFB
- 18 RTS BP325 headset boxes
- 2 Telos Hx2 digital telephone interfaces
- 4 RTS TIF 2000As
- 12 Line phone system
- 8 Two-Way Radios with 2 base stations

## Graphics

- Remote graphics (Upon request)
- For-A Telestrator with HD touchscreen
  - 2 ST fibers required

## Engineering & Misc

- 128 Port Evertz NATX IP router
- 10,240x10,240 Evertz audio router connected via IP to CALREC
- Embedded audio, 18 MADI, 48 AES, 96x192 analog
- 9 Frame sync/cross converters with fiber inputs/outputs
  - 2 AJA FS1-Xs, 7 AJA FS-HDRs for a total of 32 paths
- Ross Ultricore tally system with virtual tally
- 2 Lighting Kits

## Outboard Monitors

- Sixteen 16" Outboard LCD video monitors
  - Capability to provide HD program to booth (If fiber is available)

## Cable

- 600' 10 Line video mult
  - Two 125', Four 75', One 50'
- 2150' TAC singlemode fiber
  - One 500', Four 300' TAC-12, Three 150' TAC-12
- 3720' SMPTE fiber
  - Two 500', Seven 250', Seven 100', Nine 30'
  - Two 5 line SMPTE mults 150'
- 2300' DT12
  - Five 250', Seven 150'
- 175' Three phase power cable
  - Set of 100', 75', and 50'
- Additional cable available if shipped separately

## Power Required

- 208 VAC, three phase, 200 amps
  - Separate 200 amps of three phase 208 VAC may be required in high heat locations

# 57VMU Equipment Specifications

The following equipment is available to the Visitor Feed in addition to 57FLEX A Unit equipment. This trailer is fully networked to the A Unit with extensive fiber connectivity. All cameras and record trains are available to both trailer

## Production

- 3 Stripe Karrera switcher control panel
- 3 M/Es assigned to visitor show
- Up to 63 images in production wall

## Replay, Spotbox and Edit Systems

- XFile3 with USB 3.0
- 2 Channels of Spot Box from A Unit
- Lance TDC-100 Disk Controller
- Up to 2 EVS replay operator positions
- One position uses LSM connect (No VGA)

## Audio

- CALREC Brio 36 (36 fader)
  - 24 Mic/line inputs
  - 16 Analogue outputs
  - 8 AES3 digital inputs, 8 AES3 digital outputs
  - 8 GPI + 8 GPO
  - Loudness meters
  - Delay available on every path
  - Up to 96 legs assignable as mono, stereo, or 5.1 input channels
  - 36 legs assignable as mono, stereo or 5.1 mains or groups
  - 24 legs assignable as mono or stereo auxes
  - Up to 96 legs assignable as Insert sends and returns
  - Up to 96 legs assignable as Direct, or Mix-Minus Outputs
  - Every input channel and group path have expander/Gate/Ducker, with key input and sidechain EQ; a compressor with key input and sidechain EQ and multiband compressor
  - Every aux has expander/gate and compressor
  - Every main has a single band compressor and multiband compressor
- Enco HotShot2 audio playout system
- 5 Sennheiser MD 46 stick mics
- 5 Sennheiser HMD sportscaster headsets
- 5 Studio Technologies talkback boxes
- Sound devices MP-1 line amp
- Cloud CL-1 Mic activator

## Communications

- RTS Intercom system integrated with A Unit
- 8 Channels of IFB
- 6 Model 34 Talent Amplifiers for IFB
- 6 RTS BP325 headset boxes
- Telos Hx2 digital telephone interface
- 2 RTS TIF 2000As from A Unit
- 2 Two-Way Radios with base station

## Engineering & Misc

- Lighting Kit
- Grass Valley LDX C92 single mode fiber camera with Fujinon XA20sx8.5 ENG lens and tripod (For Booth)

## Outboard Monitors

- Four 16" Outboard LCD video monitors
  - Capability to provide HD program to booth (If fiber is available)

## Cable

- 900' DT12
  - Six 150'
- 225' Three phase power cable
  - Set of 100', 75', and 50'
- Additional cable available if shipped separately

## Power Required

- 208 VAC, three phase, 150 amps